WA250-3 Wheel Loader



BUCKET CAPACITIES 2.5 – 3.5 yd³ 1.9 – 2.7 m³





VVA250-3

WHEEL LOADER

WA250-3 Wheel Loader

WALK-AROUND

Designed for better value through improved reliability and enhanced versatility.

That's why the WA250-3 means VALUE,

and anything less is just another Wheel Loader.

Komatsu-integrated design for the best value, reliability, and versatility. Engine, power train, frame, and all other major components are engineered by Komatsu. You get a machine

whose components are designed to work together for higher

production, greater reliability, and more versatility.

two-door walk-through and finger-touch shifting. See page 5.



New cab for increased operator productivity. New operator's cab provides better visibility, increased comfort, see-at-a-glance console,

New special rubber-mounted cab for productivity. Special rubbermounted cab reduces vibration and noise that can fatigue the operator and reduce his efficiency. See page 5.

Komatsu diesel power for productivity and reliability. See page 6.

New easier access to engine for servicing.

Pneumatic cylinders assure the gull-wing side covers and rear grill open with an easy touch. See page 8.

Ground level greasing reduces maintenance time.

Komatsu torque proportioning differentials are standard. See page 7.

> Sight gauges for hydraulic tank and transmission case.

Check battery and clean radiator easily. The rear grill also uses pneumatic cylinders for easy access to the radiator

See page 8.

Ground level fueling.

and battery.

of the work equipment. An optional third spool valve is available for additional hydraulic functions.

tool changes without leaving the cab. This new design also allows superior visibility

Optional coupler system. The versatile coupler system provides fast, efficient

ECSS value-option for better productivity. Electrically Controlled Suspension System (ECSS) absorbs pitching and bouncing. See page 5.

New sealed, wet disc parking brake for better reliability and less maintenance cost. See page 7.

Quick kick-down transmission switch is another standard feature. See page 7.

New Komatsu 4-speed transmission better matches all applications for reliability, productivity, and versatility. See page 7.

It all adds up to more value and better return for your investment. It's what you expect when you select Komatsu.

OPERATORS

COMPARIMENT

Ask the man who runs one—he will tell you the operator's cab sets the Komatsu Wheel Loader apart from the others. That's a productivity feature you can't ignore. No matter how a machine specs out, or how much is promised for productivity, unless the operator can work a full shift without becoming fatigued, you will never get the full measure of promised productivity.

The cab improvements on the Wheel Loaders go beyond providing a large cab with a comfortable seat. Improvements include these production enhancing standard and optional features:

- Large curved glass front window provides the operator an unobstructed view of the working area and attachment.
- Two-door walk-through cab. Good for ventilation as well as easy entry and exit from either side of the cab.
- Rubber mounts dampen noise and vibration, reduces fatigue caused by noise. Helps keep the operator productive, longer.
- Low-effort brake pedals actuate fully hydraulic brakes. Parking brake provides effective braking with light foot pressure.
- Steer with ease. Komatsu's fully hydraulic steering provides fast response with low effort, at low engine rpm.



- Kick-down switch is conveniently located on the boom shift lever.
 A simple motion of the thumb actuates this valuable productivity feature, which enables the operator to downshift easily.
- Easy shifting and directional changes with Komatsu 2-lever electronic shifting. Change direction or shift gears with a touch of the fingers without removing the shifting hand from the steering wheel. Solid state electronics and conveniently located direction and gear shift controls make this possible.
- At-a-glance instrument monitor.
 Monitor is mounted in front of the operator and is tilted for easy view, allowing the operator to easily check gauges and warning lights.
- See the monitor through the steering wheel, not around it.
 A specially designed two-spoke steering wheel allows the operator to easily see the instrument panel.



Value Options

Value options for productivity and those little added touches that make work a little easier.

- Keep cool, keep productive with a five-mode air conditioner.
 Thirteen strategically-located vents direct cool air to the operator, keeping him productive on the hottest days.
- There's nothing more refreshing than a cold drink on a hot day. The cool box located behind the seat will help keep your lunch and beverage cool. That's something to look forward to at lunch or break-time.
- Make the time go faster with an auto-tuning AM/FM cassette radio.
 Includes a digital clock and access to a weather station. Removable control head minimizes vandalism.
- Optional Electrically Controlled Suspension System (ECSS). Takes the bounce out of the ride on rough ground surfaces. Provides greater comfort and confidence for the operator as well as increased travel speed and steering stability, while improving the material retention in the bucket. A switch in the operator's compartment initiates the electrical circuit that actuates solenoid selector valves for the boom cylinders as well as pressure switches for the accumulators. This allows the accumulators to absorb the shocks during roading.

4

- adjustment-free, wet multi-disc for high reliability and long life.
- Added reliability is designed into the braking system by the use of

Komatsu designed axles and

final drives for rugged reliability

Axles shafts are semi-floating, the

front axle housing is fixed. The rear

axle housing is a center-pin support

The differential reduction gear is

a heavy-duty spiral bevel gear for

strength and reliable performance

Rugged, inboard planetary final drives

carry the total gear reduction of the

hydraulic braking system mean

lower maintenance costs and higher

reliability. Wet disc brakes are fully

sealed. Contaminants are kept out,

reducing wear and resulting mainte-

nance. Brakes require no adjustments

for wear, meaning even lower mainte-

nance. The new parking brake is also

drive train to the wheel which is

Wet disc brakes and fully

mounted to the axle hub.

design that provides a total oscillation

and low maintenance.

of up to 30 degrees.

two independent hydraulic circuits. Provides hydraulic back-up in case

one of the circuits fail.

Full hydraulic brakes mean no air system to bleed, or the condensation

of water in the system that can lead

to contamination and corrosion.

KOMATSU DESIGNED POWER TRAIN

Komatsu integrated design means components are matched to provide most efficient use of power whether you're working the face of a material bank or travelling with a loaded bucket.

The WA250-3 Wheel Loader is designed to effectively match the engine, 4-speed transmission, torque proportioning differentials, axles, and brakes to the most severe applications.

KOMATSU EMISSIONIZED S6D102E-1 DIESEL ENGINE

Four-cycle, water-cooled, turbocharged, six cylinder engine that is not only fuel efficient, but meets North American emission requirements.

With a piston displacement of 359 in³ 5.9 ltr, the Komatsu S6D102E-1 has 127 net flywheel

horsepower at 2400 rpm.

Other engine features include:

- Automatic electric cold-weather **heating system**. The preheating time of the engine is automatically set according to the engine water temperature. Provides for quick starts and reduces added wear of cold weather starts made without
- this heating system. Large capacity, double-wrapped muffler is mounted under the hood for lower engine noise and better
- operator visibility. • Simple, rugged design for depend-
- ability and low service requirements. • Gull-wing doors use pneumatic cylinders to allow easy access to the engine and radiator for routine
- maintenance. • Spin-on filters and easily accessible lubrication points mean reduced maintenance time and less chance of missing these important
- maintenance items. Sealed wet disc service brakes. Resistant to contaminates even when
- working in hostile environments. • Maintenance-free parking brake is located in the transmission case and

is a wet multi-disc brake.



• • • • • •

Transmission

FOUR-SPEED TRANSMISSION REPLACES THREE-SPEED TRANSMISSION

Provides maximum forward speed in fourth gear of up to 21.4 mph 34.5 km/h and **21.7 mph** 35.0 km/h in reverse. The countershaft transmission is full power shift and soft-shift.


Other features include:


NEW KOMATSU

- Solid state electronic shifting control that reduces wear, increases reliability and provides easy directional shifts.
- Fingertip shifting from forward to reverse or from one gear to another.
- Four forward and four reverse gears to better match the cycle conditions. You get higher efficiency and better fuel economy.

Consider this valuable feature for added productivity. Kick-down switch automatically downshifts with the touch of a finger from second to first when beginning the digging cycle. Automatically upshifts from first to second when direction control lever is placed in reverse. The result is increased rim pull for better bucket penetration and reduced cycle times

conventional differentials

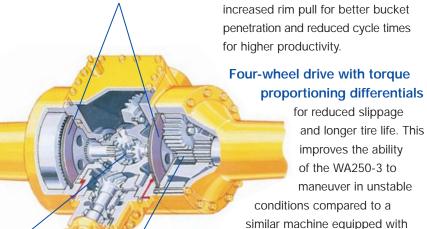



EASY MAINTENANCE

SERVICING WITH A SMILE

It would be better if most of us approached routine maintenance and service as something that made us smile. That's why Komatsu designed the WA250-3 Wheel Loader to make servicing as easy as possible. We know by doing this, routine maintenance and servicing are less likely to be skipped, which can mean a reduction in costly downtime later on. Here are some of the many service features found on the WA250-3.

Komatsu design means more value

- Large service doors provide easy access to the engine compartment.
- Ground Level Greasing—all grease points are easily reached from ground level and grease banks are provided in some areas to reduce maintenance time.
- Batteries are located in the counterweight for groundlevel access.
- Sealed Loader Linkage Pins designed to keep grease contained longer and prevent the entrance of dust, thereby lengthening greasing intervals.



WA250-3 Wheel Loader

SPECIFICATIONS



ENGINE

Type	Komatsu S Water-coole	ed, 4-cycle bocharged
	4.0" x 4.7" 102 mm	
·	Mechanical, all-spe	
Horsepower Rating @ 2	2400 rpm (SAE J1349)	
	hp	kW
Gross power	135	101
Net power	127	95
Meets 1997 EPA emissions reg	ulations	
Fuel system Lubrication system	Direc	ct injection
,	Gear pump, force-	lubrication
Filter		. Full-flow
Air cleaner	Dry-type with double	elements
	and dust evac	uator, plus
	dus	t indicator



Torque converter 3-element, single-stage, single-phase Transmission........... Full power shift, countershaft Speed* Forward 5.0 mph 4.8 mph 7.8 km/h **7.5 mph** 12.0 km/h **7.6 mph** 12.3 km/h **13.2 mph** 21.2 km/h **13.5 mph** 21.8 km/h **21.4 mph** 34.5 km/h **21.7 mph** 35.0 km/h

*Measured with 17.5/25 tires

AXLES AND FINAL DRIVES

Drive system	Four-wheel drive
Front	Fixed, semi-floating
Rear	Center-pin support, semi-floating
	30° total oscillation
Reduction gear	Spiral bevel gear
Differential gear	Torque proportioning
Final reduction gear	. Planetary gear, single reduction



Service brakes: Hydraulically-actuated, wet disc brakes actuate on four wheels.

Parking brake: Wet multiple disc brake on transmission output shaft.



STEERING SYSTEM

Type Orbital, full-hydraulic po	wer
steering independent of engine	rpm
Steering angle	tion
Minimum turning radius at the	
center of outside tire	mm



BUCKET CONTROLS

U	ontroi positions	
	Boom	. Raise, hold, lower, and float
	Bucket	Rollback, hold, and dump



HYDRAULIC SYSTEM

capacity (discharge flow) @ engi	ne rateu rpm	
Loader Pump	46.2 gal/min	175 ltr/min
Steering Pump	34.9 gal/min	132 ltr/min
(Gear Pumps)		
Poliof valve setting		

Loader	3,000 psi 210 kg/cm ²
Steering	2,700 psi 190 kg/cm ²
Control valve	

2-spool open center Hydraulic cylinders

Loader and Steering . Double-acting, piston

Hydraulic Number of

yimaers	cylinders	Б	ore	311	oke
Boom	2	4.7"	120 mm	28.1"	714 mm
Bucket	1	5.9"	150 mm	19.6"	498 mm
Steering	2	2.8"	70 mm	18.1"	460 mm
draulic c	ycle time (ra	ted load	in bucket)		
ise	- 				5.8 se
mp					1.7 se




SERVICE REFILL CAPACITIES

ooling system	36.5 ltr
uel tank	184.0 ltr
ngine	19.5 ltr
ydraulic system 16.9 gal	64.0 ltr
xle (each front and rear)	17.0 ltr
orque converter and transmission 7.9 gal	30.0 ltr



WA250-3



	Tires	17.5/25-1	12PR (L2)
	Tread	6'4"	1930 mm
	Width over tires	7'10"	2375 mm
	Wheelbase	9'6"	2900 mm
	Hinge pin height, maximum height	12'1"	3680 mm
	Hinge pin height, carry position	1'4"	400 mm
1	Ground clearance	1'4"	395 mm
	Hitch height	3'0"	910 mm
	Overall height, top of the stack	10'1"	3075 mm
	Overall height, ROPS cab	10'6"	3195 mm

Bucket	General Purpose with Excavating with ucket Bolt-on Cutting Edge Bolt-on Cutting Edge			terial with utting Edge			
Bucket Capacity	SAE Rated	2.75 yd³	2.1 m ³	2.5 yd ³	1.9 m ³	3.5 yd ³	2.7 m ³
	Struck	2.35 yd³	1.8 m ³	2.1 yd ³	1.6 m ³	3.0 yd ³	2.3 m ³
Bucket Width		8'10"	2685 mm	8'10"	2685 mm	8'10"	2685 mm
Bucket Weight		2,140 lb	970 kg	2,060 lb	935 kg	2,270 lb	1030 kg
Static Tipping Load	Straight	21,520 lb	9760 kg	21,440 lb	9725 kg	21,080 lb	9560 kg
	40° full turn	18,940 lb	8590 kg	18,870 lb	8560 kg	18,550 lb	8415 kg
Dumping Clearance, maximum height and 45° dump angle		9'1"	2760 mm	9'2"	2795 mm	8'8"	2630 mm
Reach at 7' 2130 mm and 45° dump angle		4'11"	1490 mm	4'10"	1470 mm	5'1"	1550 mm
Reach at maximum height and 45° dump angle		3'5"	1040 mm	3'4"	1005 mm	3'10"	1170 mm
Reach with arm horizontal and bucket level		7'4"	2240 mm	7'2"	2190 mm	8'0"	2425 mm
Operating Height	Fully raised	16'2"	4915 mm	15'10"	4815 mm	16'7"	5060 mm
Overall Length	Bucket ground	22'9"	6940 mm	22'7"	6890 mm	23'4"	7120 mm
	Bucket at carry	22'9"	6920 mm	22'7"	6885 mm	23'1"	7040 mm
Turning Radius*		19'0"	5780 mm	18'11"	5770 mm	19'2"	5830 mm
Digging Depth	0°	6"	140 mm	6"	140 mm	6"	135 mm
	10°	1'1"	325 mm	1'1"	315 mm	1'2"	350 mm
Breakout Force		27,780 lb	12600 kg	29,540 lb	13400 kg	23,370 lb	10600 kg
Operating Weight		24,790 lb	11243 kg	24,715 lb	11210 kg	24,925 lb	11306 kg


• All dimensions, weights, and performance values based on SAE J732c and J742b standards. Static tipping load and operating weight shown include 17.5/25-12PR (L2) tires, additional counterweight, lubricant, coolant, full fuel tank, ROPS cab, and operator. Machine stability and operating weight are affected by counterweight, tire size, and other attachments. Do not use tire ballast with additional counterweight. Apply the following weight changes to operating weight and static tipping load.

Weight Changes

	Char	Change in		Change in Tipping Load			
	Operatin	Operating Weight		ight	Full Turn		
17.5/25-12PR (L3)	88 lb	40 kg	66 lb	30 kg	55 lb	25 kg	
20.5/25-12PR (L2)	727 lb	330 kg	551 lb	250 kg	485 lb	220 kg	
20.5/25-12PR (L3)	926 lb	420 kg	727 lb	330 kg	639 lb	290 kg	
Install ROPS canopy (instead of cab)	-530 lb	–240 kg	-460 lb	–210 kg	-410 lb	–185 kg	

WA250-3 Wheel Loader

BUCKET SELECTION GUIDE



* This guide, representing bucket sizes not necessarily manufactured by Komatsu, will help you select the proper bucket size for material density, loader configuration, and operating conditions. Optimum bucket size is determined after adding or subtracting all tipping load changes due to optional equipment. The 90% bucket fill line on this guide is recommended when operating in conditions such as soft ground and unlevel surfaces. The 105% bucket fill condition on this guide is sometimes utilized when operating on firm ground and level surfaces.

Material (loose weight)	lb/yd³	kg/m³
Caliche	2,100	1250
Cinders	1,000	590
Clay and gravel, dry	2,400	1420
Clay and gravel, wet	2,600	1540
Clay, dry	2,500	1480
Clay, natural bed	2,800	1660
Clay, wet	2,800	1660
Coal, anthracite, broken	1,850	1100
Coal, bituminous, broken	1,400	830
Earth, dry, packed	2,550	1510
Earth, loam	2,100	1250
Earth, wet, excavated	2,700	1600
Granite, broken or large crushed	2,800	1660
Gravel, dry	2,550	1510
Gravel, dry 1/2" to 2" 13 to 50 mm	2,850	1690
Gravel, pit run (graveled sand)	3,250	1930
Gravel, wet 1/2" to 2" 13 to 50 mm	3,400	2020
Gypsum, crushed	2,700	1600
Limestone, broken or crushed	2,600	1540
Magnetite, iron ore	4,700	2790
Phosphate rock	2,160	1280
Pyrite, iron ore	4,350	2580
Sand and gravel, dry	2,900	1720
Sand and gravel, wet	3,400	2020
Sand, dry	2,400	1420
Sand, wet	3,100	1840
Sandstone, broken	2,550	1510
Shale	2,100	1250
Slag, broken	2,950	1750
Stone, crushed	2,700	1600
Topsoil	1,600	950

STANDARD EQUIPMENT

- Alternator, 50A
- Back-up alarm
- Back-up lamp
- Batteries, 2X12V/110 Ah
- Bucket positioner, automatic
- Counterweight, standard and additional
- Differentials, torque proportioning
 Engine, Komatsu S6D102E-1
- Engine shut-off system, electric
- Fenders, full front, partial rear
- Floor mat
- Horn, electric
- Lights
- —Stop and tail
- —Turn signal (2 front, 2 rear)
- —Working (2 front, 2 rear, 2 in cab)
- Maintenance monitor panel
- Mono lever loader control
- Radiator mask, hinged
- Rearview mirror
- ROPS cab
- Seat belt
- · Seat, cloth, suspension, reclining with armrests and headrest Service brakes, wet disc
- Speedometer (mph)
- Starting aid, intake manifold preheater
- Starting motor, 24V/5.5 kW
- Steering wheel, tiltable
- Sun visor
- Tires 17.5/25-12PR, (L2) tubeless and rims
- Transmission (4F, 4R)
- Transmission control, electric
- 2-spool valve for boom and bucket controls
- Vandalism protection kit
- Wiper/washer, front and rear



OPTIONAL EQUIPMENT

- Air conditioner with heater and defroster
- Automatic boom kickout
- Auxiliary steering
- Brand preference, Goodyear Bucket teeth (Esco bolt-on)
- Cutting edge, bolt-on, reversible
- ECSS (Electronically Controlled Suspension System)
- Fenders, rear full Heater and defroster
- Hydraulic adapter kit, includes valve, lever, and piping
- JRB 48" construction forks for use with coupler
- JRB Hydraulic quick coupler
- JRB 3.0 yd³ general purpose bucket for use with coupler
- JRB 2.5 yd³ general purpose bucket for use with coupler
- Large bucket cylinder
- Mud guard, front fenders
- Radio, AM/FM with stereo cassette
- ROPS canopy
- Third valve, lever, piping
- Tires (bias ply)
- —17.5/25-12PR (L3)
- —20.5/25-12PR (L2)
- ---20.5/25-12PR (L3)
- Tires (radial ply)
- —17.5-R25 XHAT (L3) Michelin
- -20.5-R25 XTLAT (L2) Michelin
- ---20.5-R25 XHAT (L3) Michelin
- ---555/70 R25 XLD70 (L3) Michelin
- Tool kit

^{*} Turning radius measured with bucket at carry position, outside corner of bucket.

SUPPORT

Count on Komatsu and your local distributor for the support you deserve. Our success depends on satisfying your need for productive equipment and supporting that equipment. That's why we have one of the largest and strongest heavy-equipment distributor organizations in North America. Their personnel are not only trained to help you select the equipment that is best-matched for your business but to support that equipment.

Finance Through its
finance company, Komatsu
can offer you a wide variety of
financing alternatives designed
to meet your needs. Programs
include municipal leases for governmental agencies, conditional sales
contracts, and leases with \$1 purchase
options for customers interested in owning their equipment. Ask your distributor
about Komatsu leasing. We offer finance and
operating leases and the unique Advantage
Lease which offers you predetermined pur-

Parts Three computer-linked parts distribution centers provide fast access to anywhere in the U.S. and Canada. Most parts are available overnight. Plus, Komatsu distributors keep a large assortment of commonly used parts in stock for immediate access.

chase, return, and renewal options.

Remanufactured parts Save money and still have the same warranty as new parts at a fraction of the cost with like-new remanufactured parts.

Maintenance Take advantage of the experience we have gained and ask your distributor about our factory-supported programs including: regular scheduled maintenance, oil and wear analysis, diagnostic inspections, undercarriage inspections, training, special service tools, parts programs, and even a special software program to help your distributor keep track of and manage service-related data.

AESS438-01 ©1998 Komatsu Printed in USA SN10(15M) 10/98 (EV-2)



Komatsu America International Company 440 N. Fairway Dr., Vernon Hills, IL 60061